

描述

小六角网机是一种捻制在特定范围内的金属丝六角网的专用系列产品。该产品设计合理，结构简单，运转平稳，性能良好，维修方便。该设备有主机，放线装置等组成。可用于饲养鸡、鸭、鹅、兔及动物园围栏，绿化带防护网等。

Description

hexagonal mesh machine, also named chicken mesh machine, is the special equipment to produce the hexagonal mesh. The machine is Reasonable design, simple structure, stable operation, good performance, convenient repair. The total line contains bobbin frame and main machine.

产品用途及性能

ABE-LNWL型捻网机是一种捻制在特定范围内的金属丝六角网的专用系列产品。该产品设计合理，结构简单，运转平稳，性能良好，维修方便。该设备有主机，放线装置等组成。

小六角网的用途：可用于饲养鸡、鸭、鹅、兔及动物园围栏，绿化带防护网等。

设备特征：

1. 可设置3捻或5捻。
2. 设备上设有断丝保护，整条生产线大概需要1-2人操作。
3. 辅助设备：1台打轴机，轴架和一台打簧机。

Product application and function

ABE-LNWL hexagonal mesh machine is the special equipment to produce the hexagonal mesh. The machine is Reasonable design, simple structure, stable operation, good performance, convenient repair. The total line contains bobbin frame and main machine.

Usage: These products can be widely used in fences of farmland and grazing land, etc.

Machine characteristics:

1. It can set to produce with 3 twists or 5 twists.
2. The machine adopts automatic stop system. If there is broken wires or broken mesh, it will stop automatically. So only 1 or 2 workers can be able to handle this machine.
3. Accessory machine: 1 set of spool winding machine, bobbin frame and one spiral coiling machine



Address: NO. 525, Jindong Road Jinxi Industrial Zone, Kunshan, Suzhou city, China.

Web: www.wireweldingmachine.com ; www.china-anbermachine.com


Tel: (+86)-510-88239310/88239309 **Fax:** (+86)-510-88237950

Email: sales@anber-inc.com

小六角网机参数 Parameter of hexagonal mesh machine

型号 Model	规格 Spec.	网孔尺寸 Mesh size (mm)	最大幅宽 Mesh width (m)	丝径 Wire dia. (mm)	捻纹数 Twist number	主轴转速 Main shaft speed (r/min)	电机功率 Power (kw)	理论速度 Theory speed (m/min)
LNWL-1015-2	1/2'	15x18	1200	0.80	3	33	3	51
LNWL-1018-2	5/8'	18x25		0.90	3			67
LNWL-1022-2	3/4'	22x33		1.20	3/5			83
LNWL-1027-2	1'	27x41			3/5			4100
LNWL-1032-2	1/1/4'	32x52			3/5			122
LNWL-1039-2	1/1/2'	39x61			3			142
LNWL-1055-2	2'	55x70		3	162			
LNWL-1078-2	3'	78x86		3/5	194			
LNWL-2015-2	1/2'	15x18	2200	0.80	3	33	3	51
LNWL-2018-2	5/8'	18x25		0.90	3			67
LNWL-2022-2	3/4'	22x33		1.20	3/5			83
LNWL-2027-2	1'	27x41			3/5			4100
LNWL-2032-2	1/1/4'	32x52			3/5			122
LNWL-2039-2	1/1/2'	39x61			3			142
LNWL-2055-2	2'	55x70		3	162			
LNWL-2078-2	3'	78x86		3/5	194			

小六角网机辅助机械 Accessory machine of hexagonal mesh machine

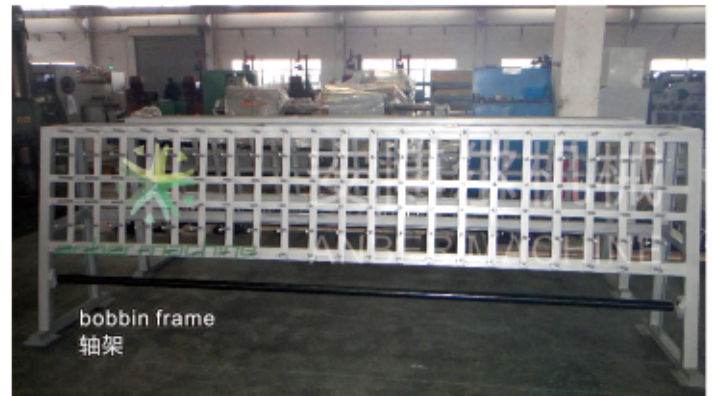

供润滑油系统

该设备安装一个供润滑油系统，由机电、油泵等组成。采用自动和定时供油两种方法。开机即开始供油，油泵上方安装了一个油阀开关，是供定时供油之用，每班至少打开3次供油。未安装供油管而需要润滑的地方为手动加润滑油处，如：上下拖板的加油孔及半齿轮处等。

Lubrication system

The lubrication system compares with motor, oil pumps, etc, there are two oiling method: automatic and timely. Start oil supplying when turn on the machine, there is an oil valve switch installed above the pump which is for timing oil supply, at least 3 times per shift. It needs lubricate manually Where there is no pipeline to lubricate, such as: oil filling hole of the carriage and the half gear, etc.

anber machine



Address: NO. 525, Jindong Road Jinxi Industrial Zone, Kunshan, Suzhou city, China.

Web: www.wireweldingmachine.com ; www.china-anbermachine.com

Tel: (+86)-510-88239310/88239309 **Fax:** (+86)-510-88237950

Email: sales@anber-inc.com